

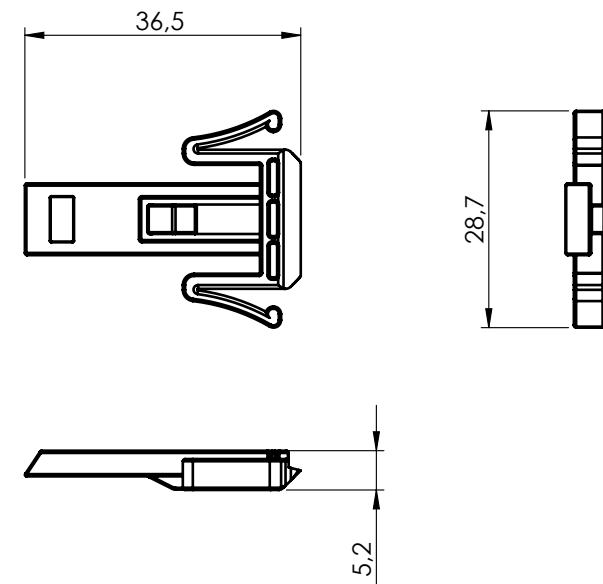
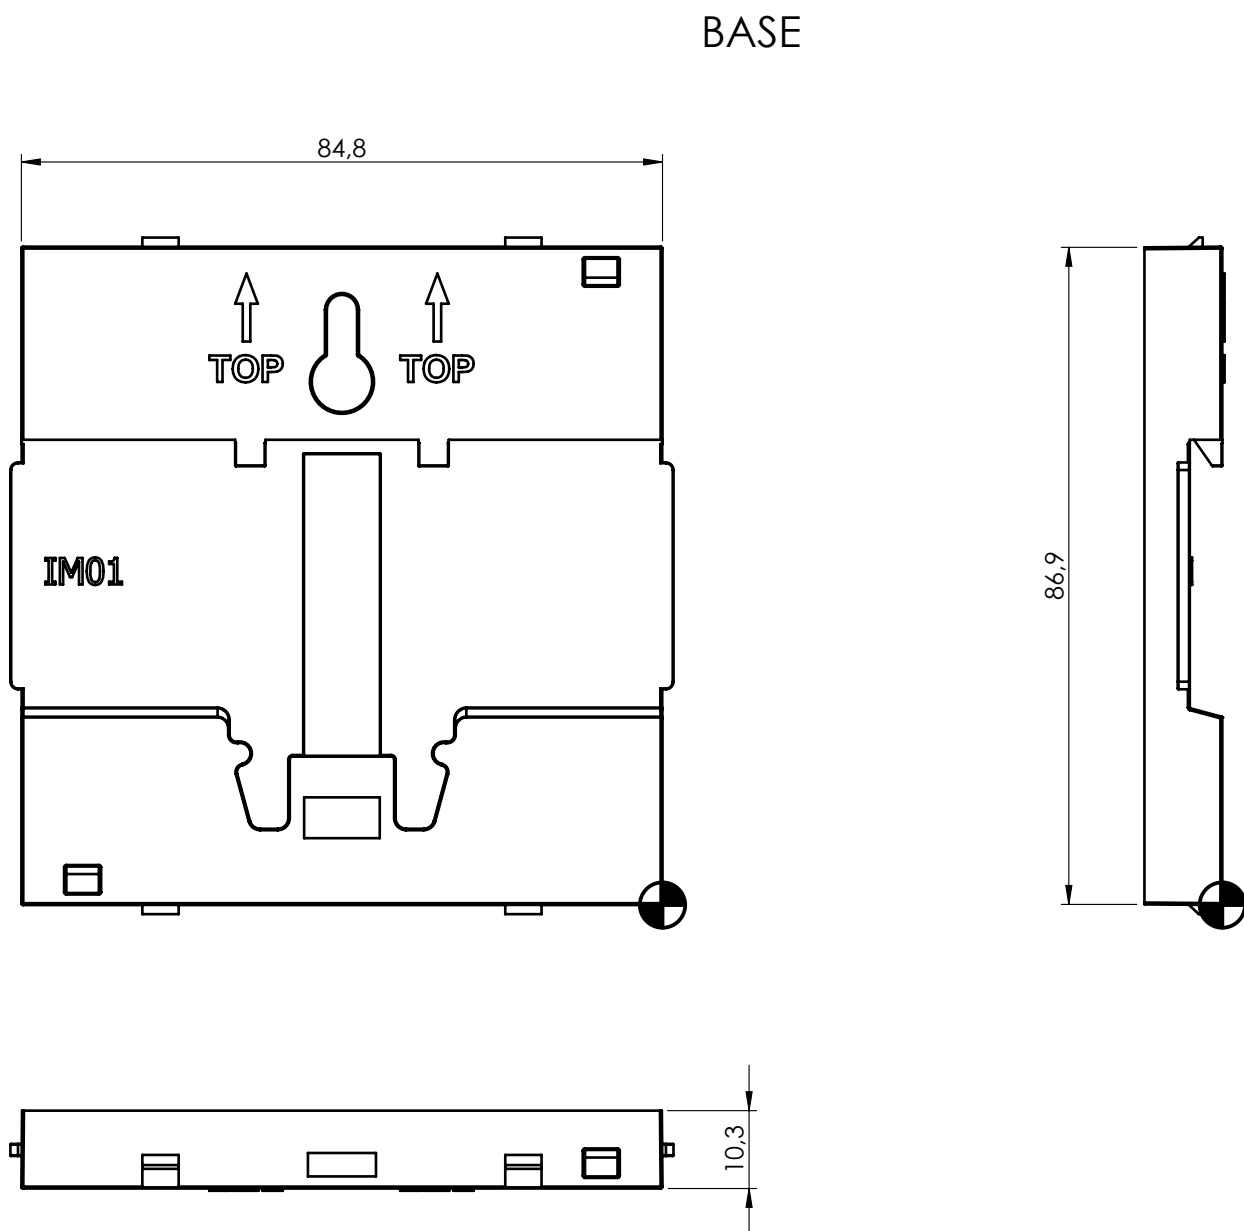
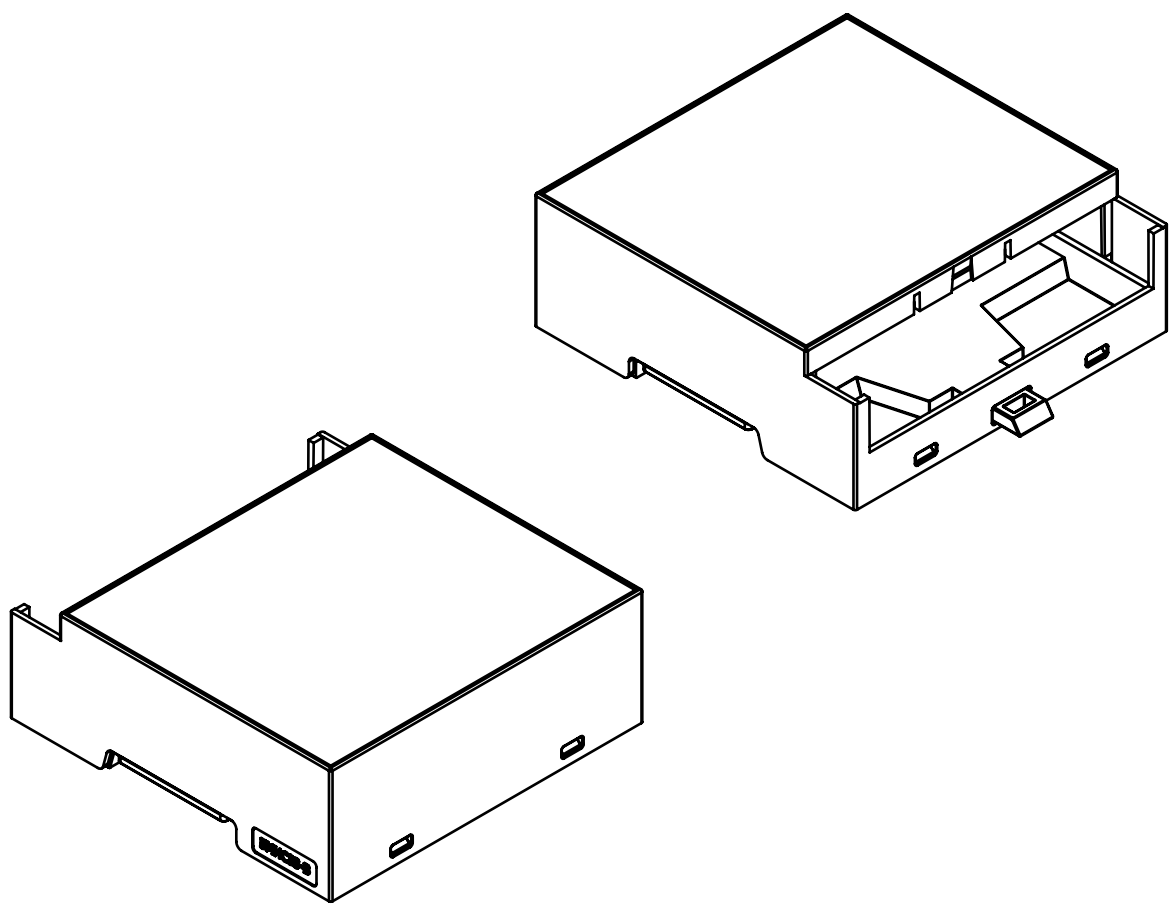
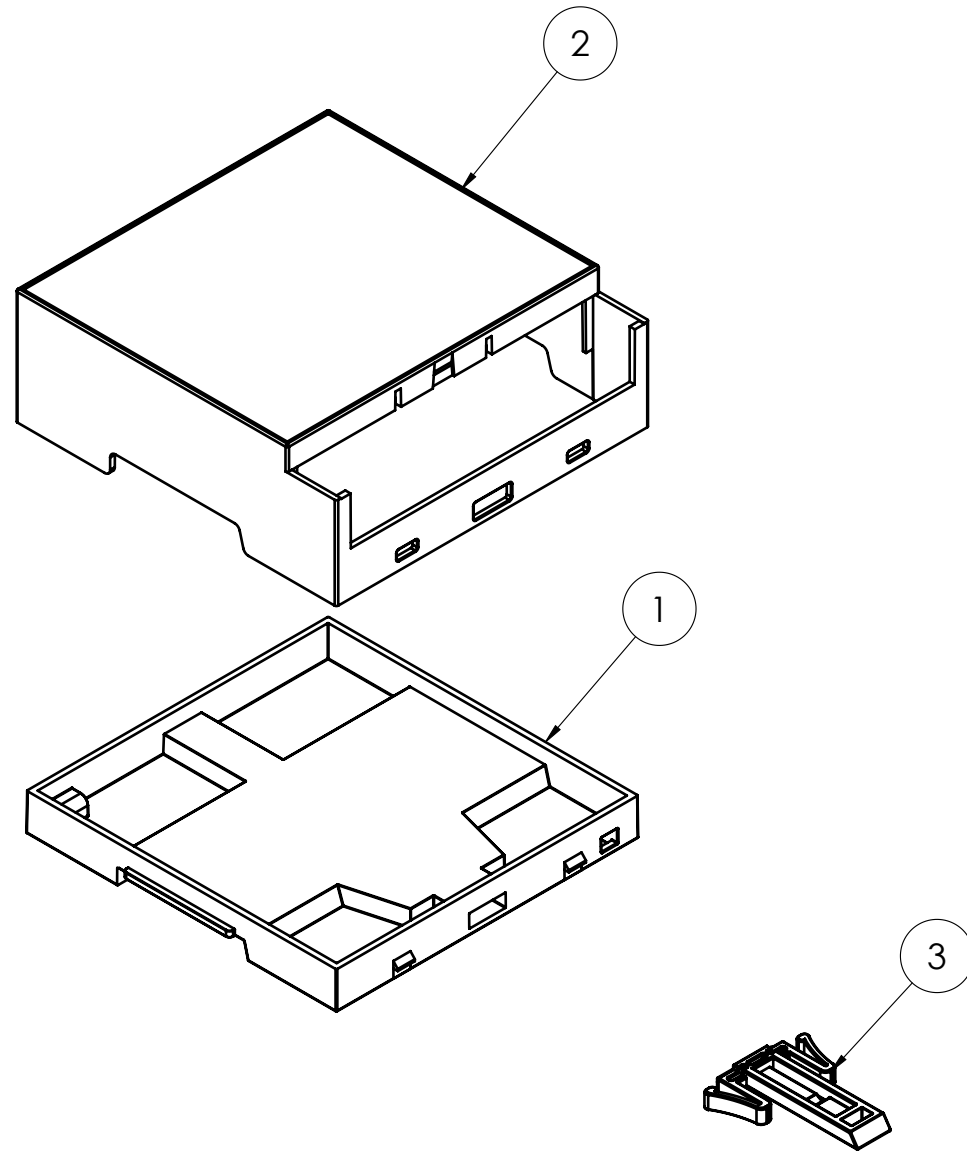
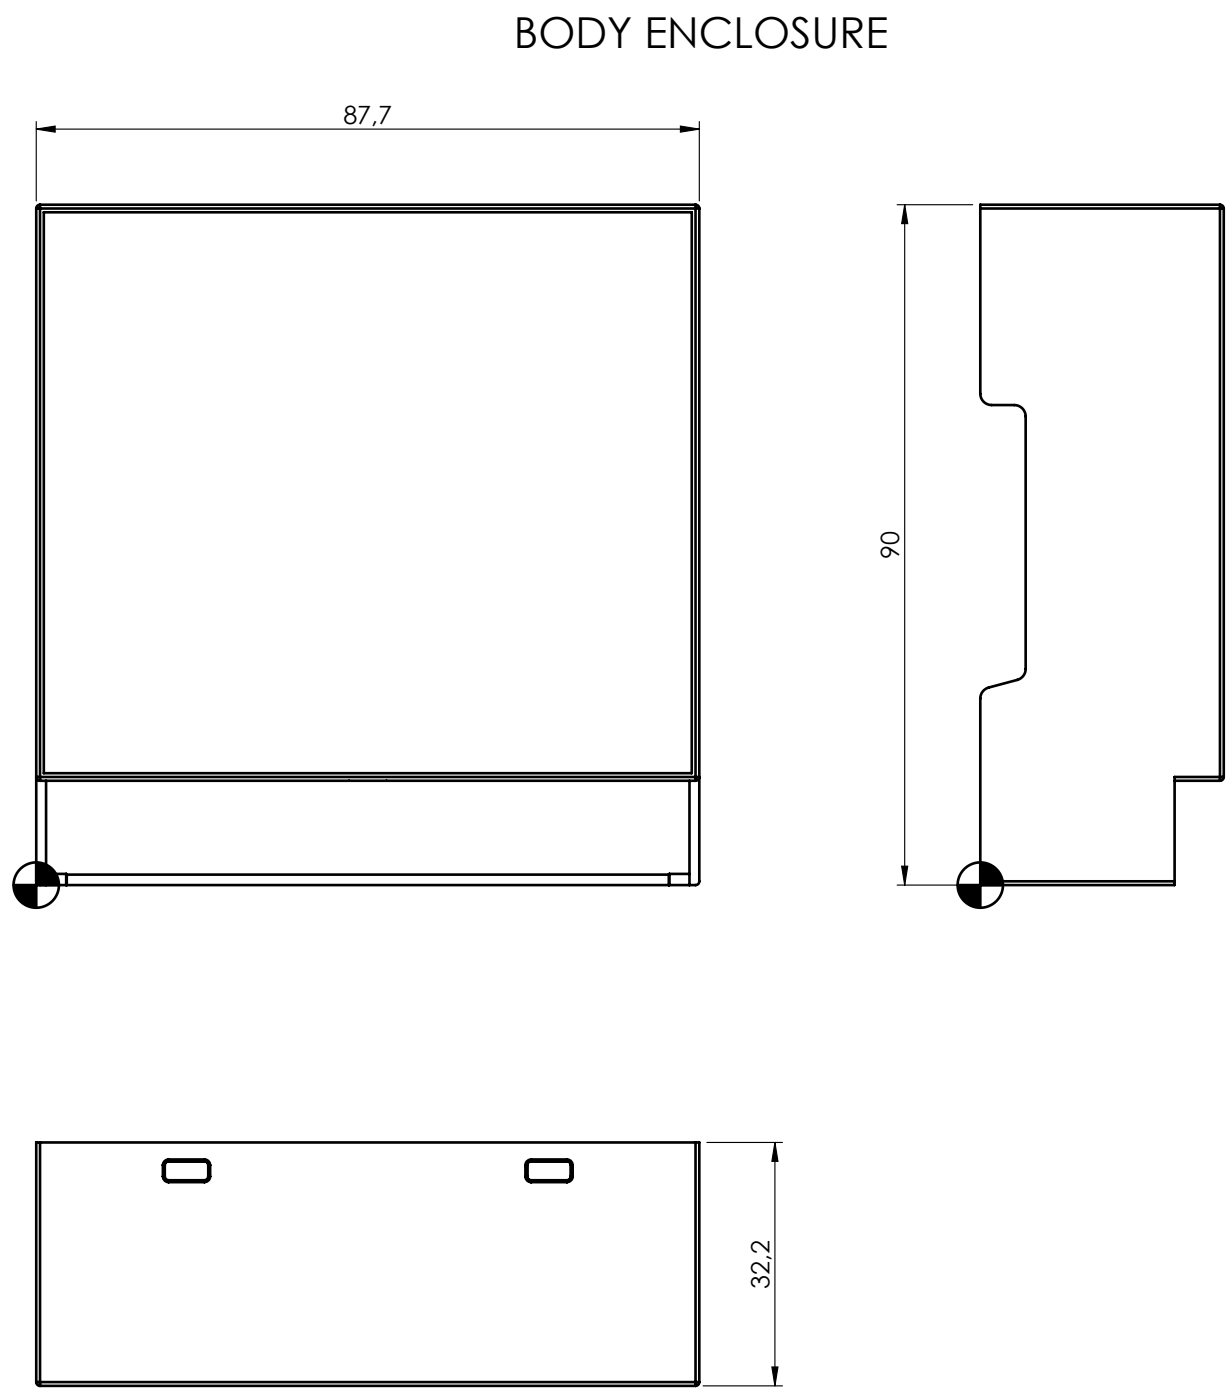
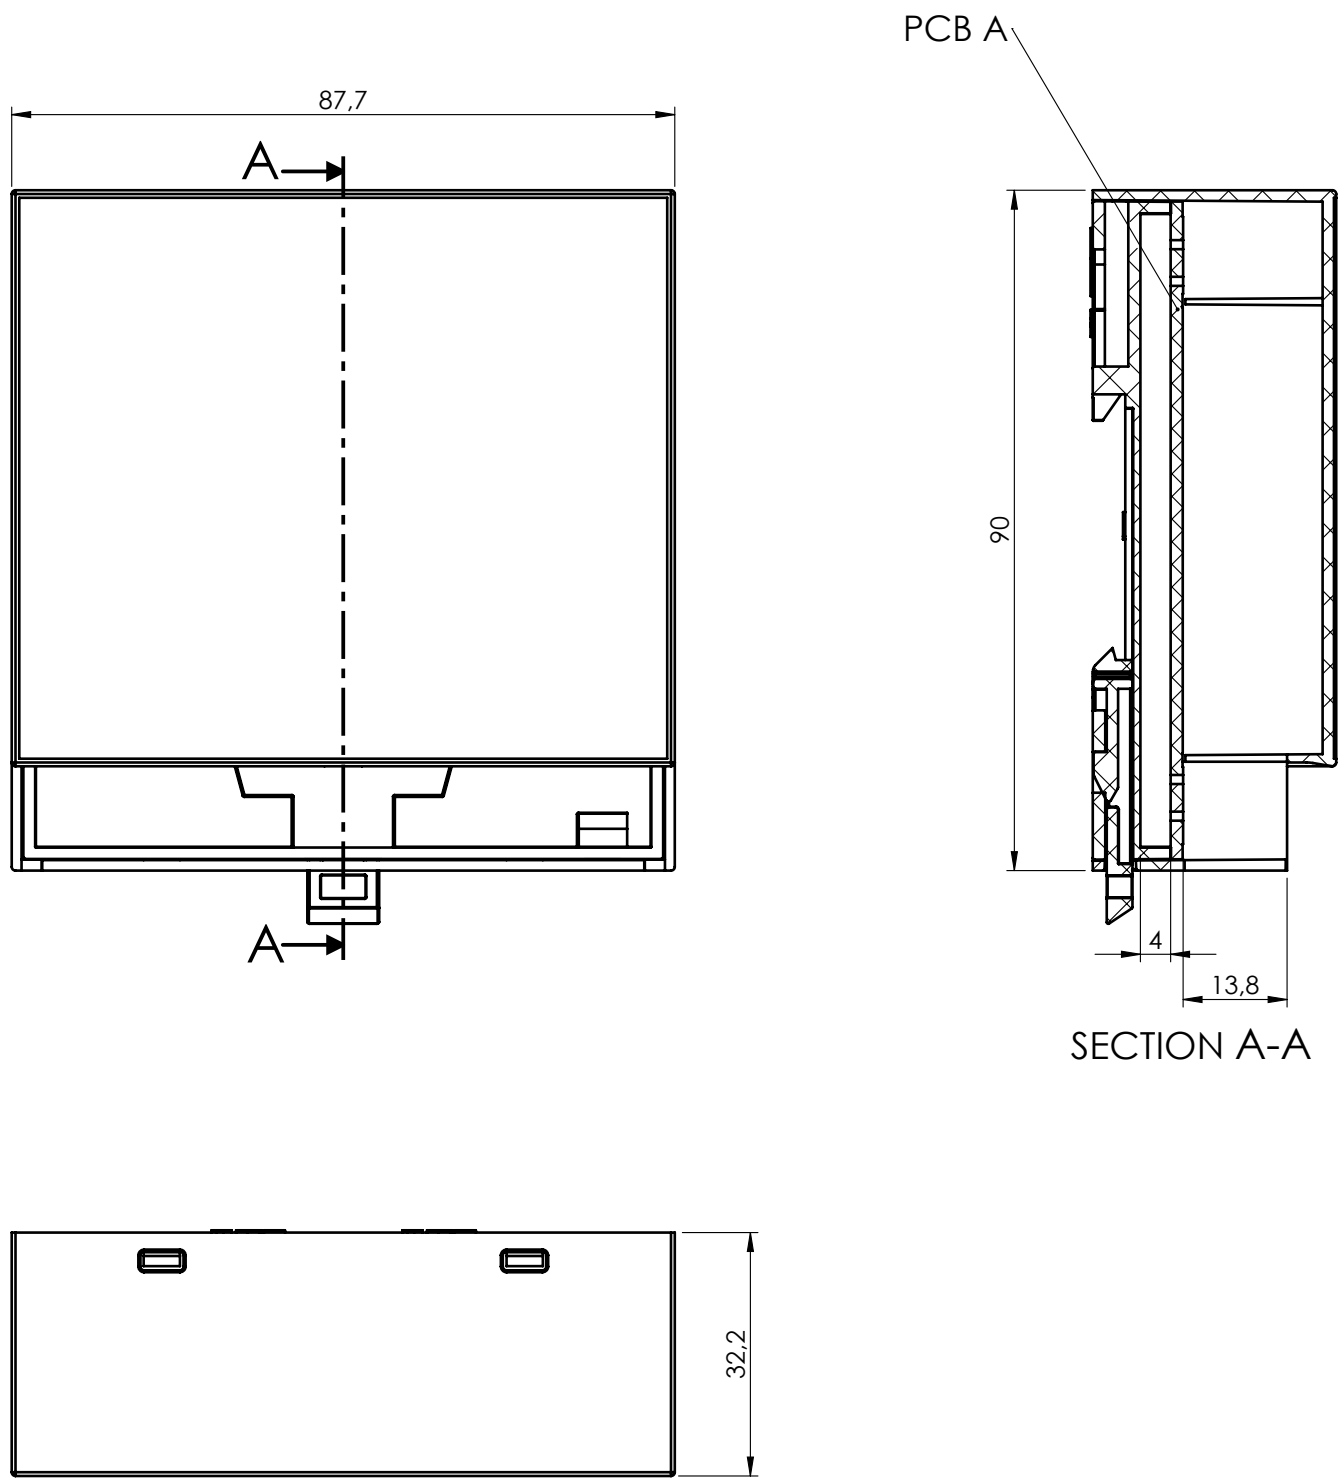
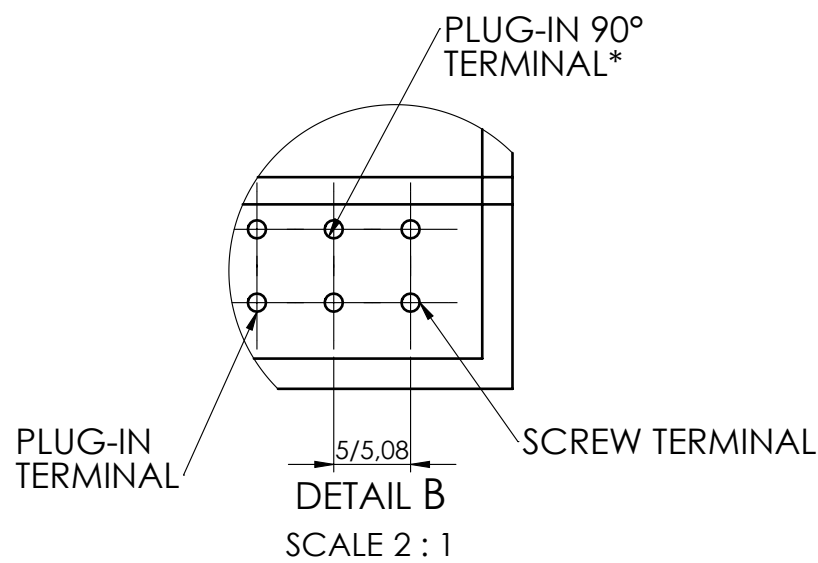


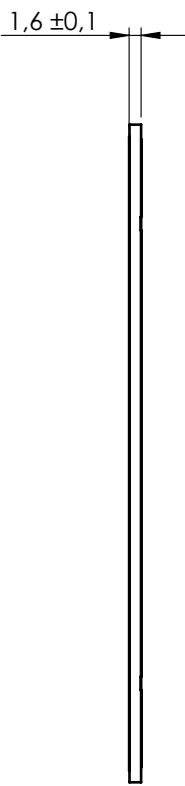

General information:
-  Workpiece zero point for mechanical processing
- Minimum recommended radius for machining = R1.0 mm
- Mounting rail like EN 60715: TH 35-7.5 or TH 35-15
- Recommended PCB outline on www.italtronic.com

RIF.	Q.TY	DRAWING	DESCRIPTION			
1	1	2_250_03678	BASE MODULBOX XT\XTS - 5M			
2	1	2_250_00010	BODY MODULBOX XTS 5MHC33-B CLOSED COMPACT			
3	1	2_250_00072	HOOK FOR MODULBOX XT-XTS			
General Tolerance UNI EN 22768/1 Media (m)						
from 0.5 to 3 ± 0.1		from 3 to 6 ± 0.1		from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5
Scale:	IM:	Drawed:	Checked:	Date:	Material:	Sheet:
1:1	--	M.S.	R.N.	13/03/2024		1
		The present drawing cannot be reproduced or communicated to a partner, even verbally, without the author's reserves to protect his own rights according to the law.		Replaces the:	Weight:	Cod. Mold:
Dimension in mm		M-05177-00		--	gr	--
Description: CONTENTITORE MODULBOX XTS 5MHC33-B CHIUSO COMPACT ENCLOSURE MODULBOX XTS 5MHC33-B CLOSED COMPACT						
Drawing nr.:					Rev.:	
3_250_00012					00	A2

Max height of the terminal:
Modulbox XT/XTS: 18.5 mm
Modulbox ONE: 20 mm

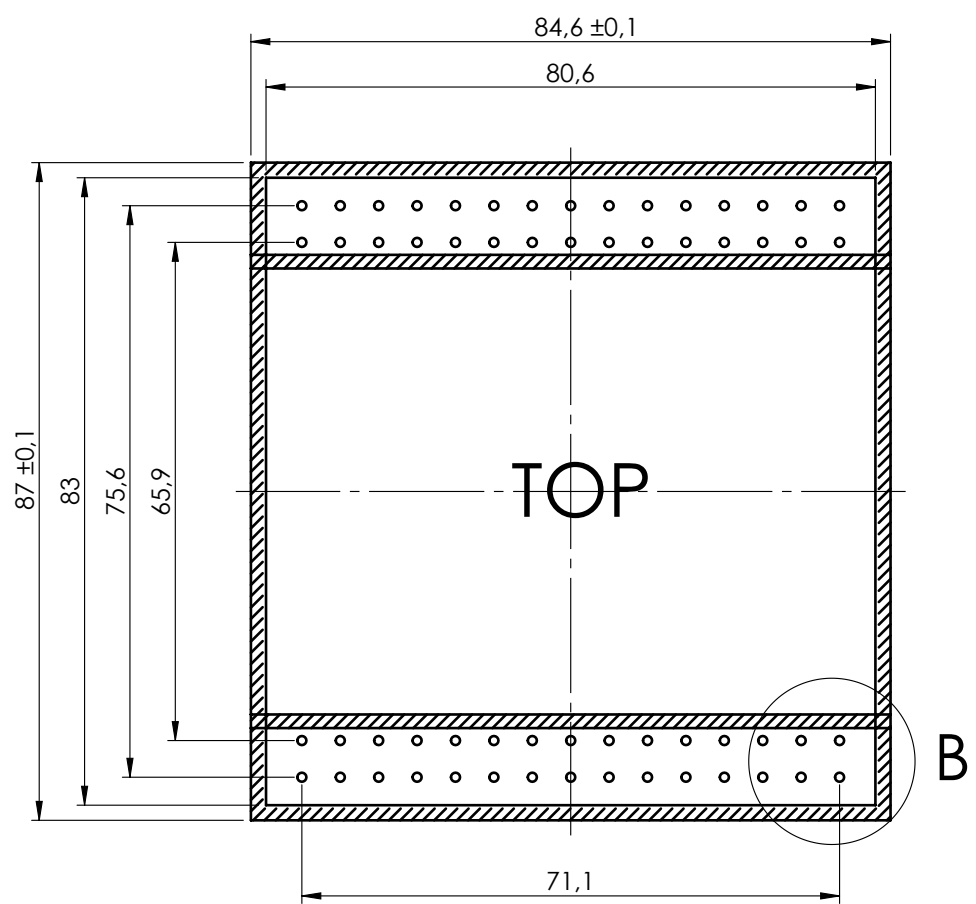

**To use the PLUG-IN terminals in Modulbox ONE use plug-in adapter P05000003E (5/5.08 pitch) and P05000004E (7.5/7.62 pitch)*

General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	PCB
Scale:	IM:	Drawed:	Checked:	Date:	Material:
1:1	--	M.S.	R.N.	13/03/2024	Process:
Dimension in mm		Replaces the:	Derived from:	Weight:	Cod. Mold:
		M-05177-00	--	gr	--
Description:					
CONTENTITORE MODULBOX XTS 5MHC33-B CHIUSO COMPACT					
ENCLOSURE MODULBOX XTS 5MHC33-B CLOSED COMPACT					
Drawing nr.: 3_250_00012					Rev.: 00
					A2

NO COMPONENTS AREA