


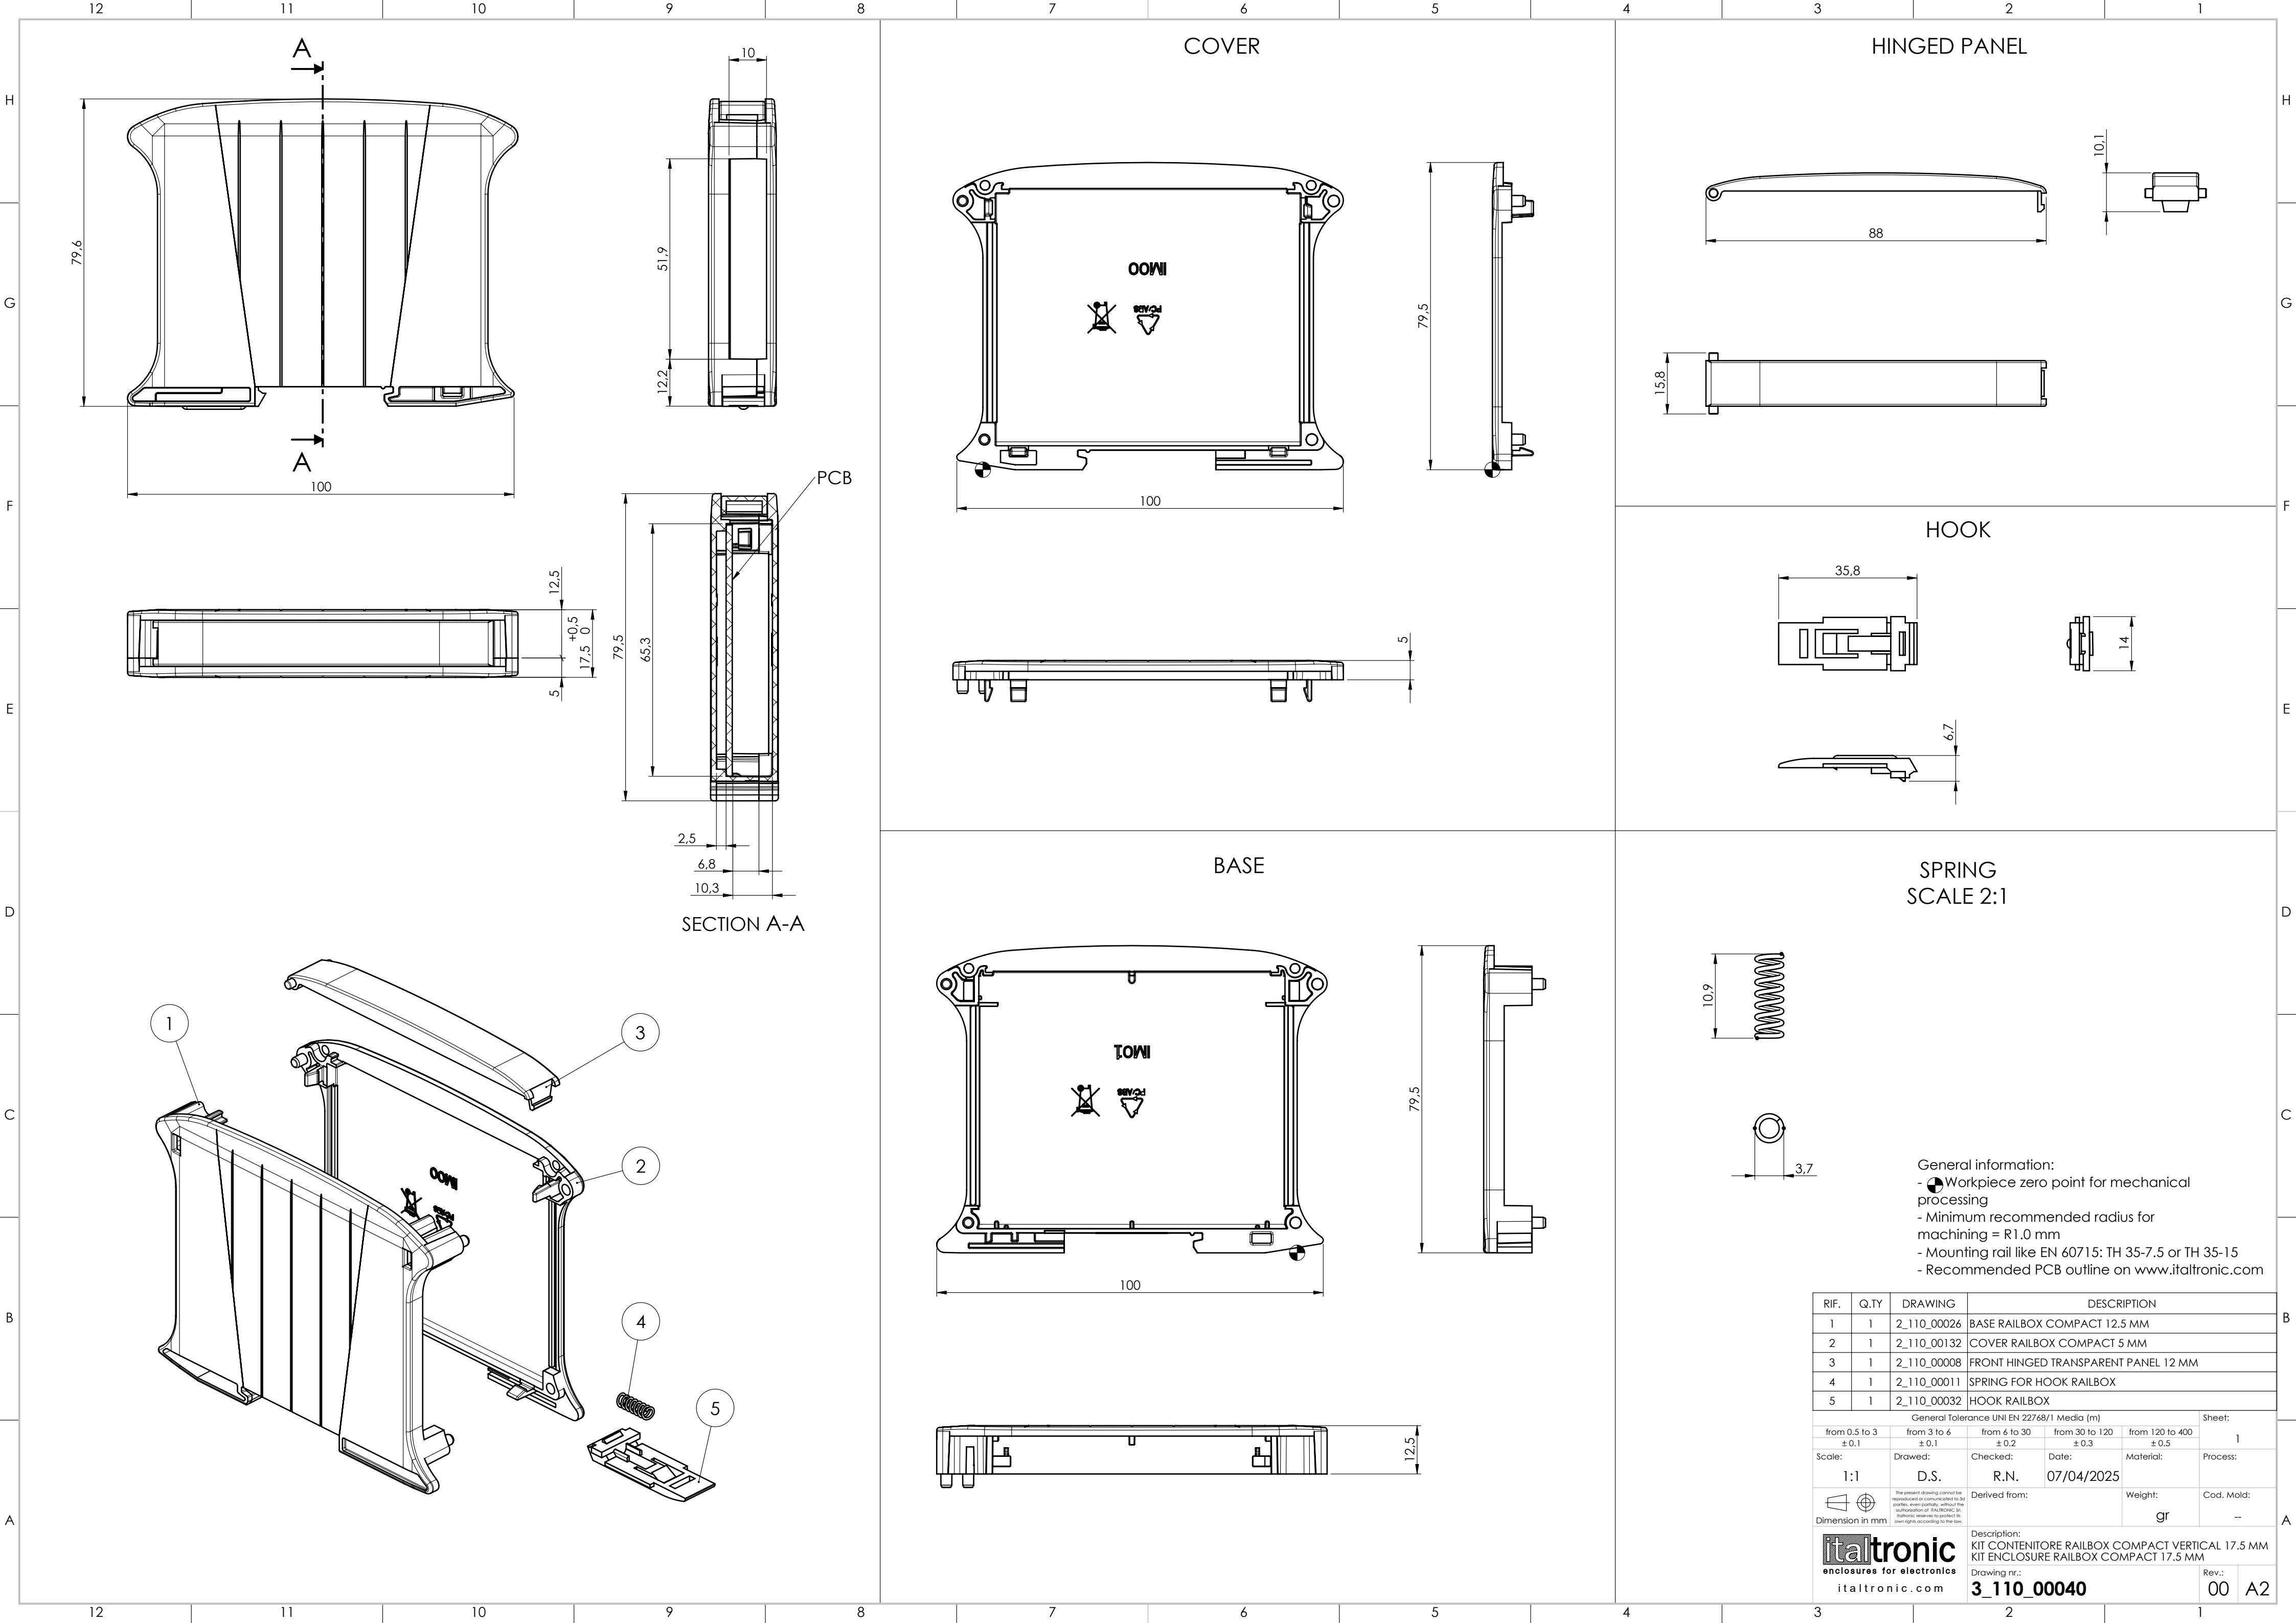


General information:


- Workpiece zero point for mechanical processing
- Minimum recommended radius for machining = R1.0 mm
- Mounting rail like EN 60715: TH 35-7.5 or TH 35-15
- Recommended PCB outline on www.italtronic.com

RIF.	Q.TY	DRAWING	DESCRIPTION		
1	1	2_110_00026	BASE RAILBOX COMPACT 12.5 MM		
2	1	2_110_00132	COVER RAILBOX COMPACT 5 MM		
3	1	2_110_00008	FRONT HINGED TRANSPARENT PANEL 12 MM		
4	1	2_110_00011	SPRING FOR HOOK RAILBOX		
5	1	2_110_00032	HOOK RAILBOX		
General Tolerance UNI EN 22768/1 Media (m)					
from 0.5 to 3 ± 0.1		from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5
Scale:		Drawed:	Checked:	Date:	Material:
1:1		D.S.	R.N.	07/04/2025	Process:
		Derived from:		Weight:	Cod. Mold:
Dimension in mm				gr	--
			Description:		
			KIT CONTENITORE RAILBOX COMPACT VERTICAL 17.5 MM		
			KIT ENCLOSURE RAILBOX COMPACT 17.5 MM		
italtronic.com			Drawing nr.:		Rev.:
3_110_00040			00		A2


SOLDER SIDE

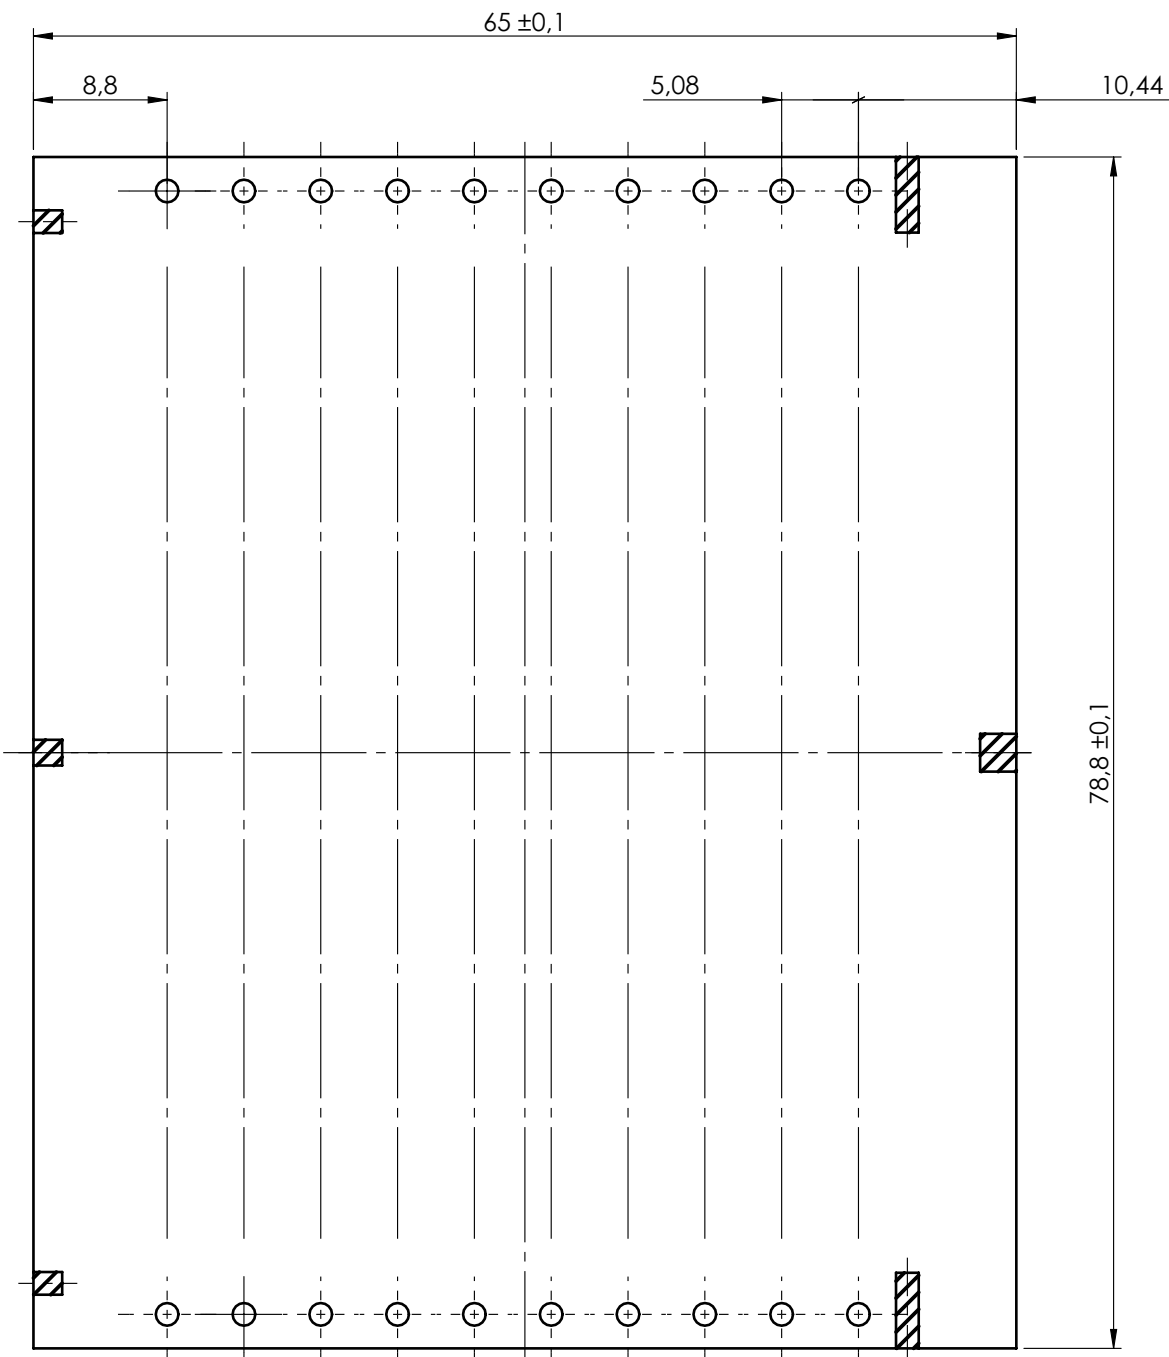

PCB

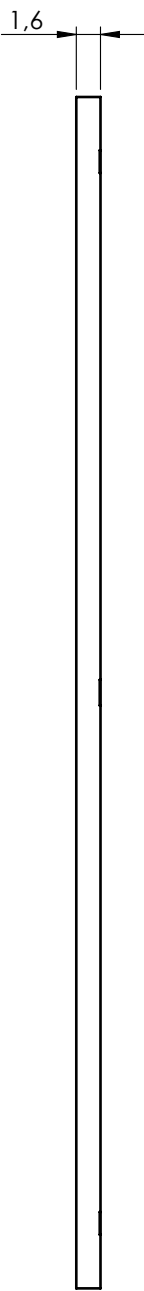

COMPONENT SIDE

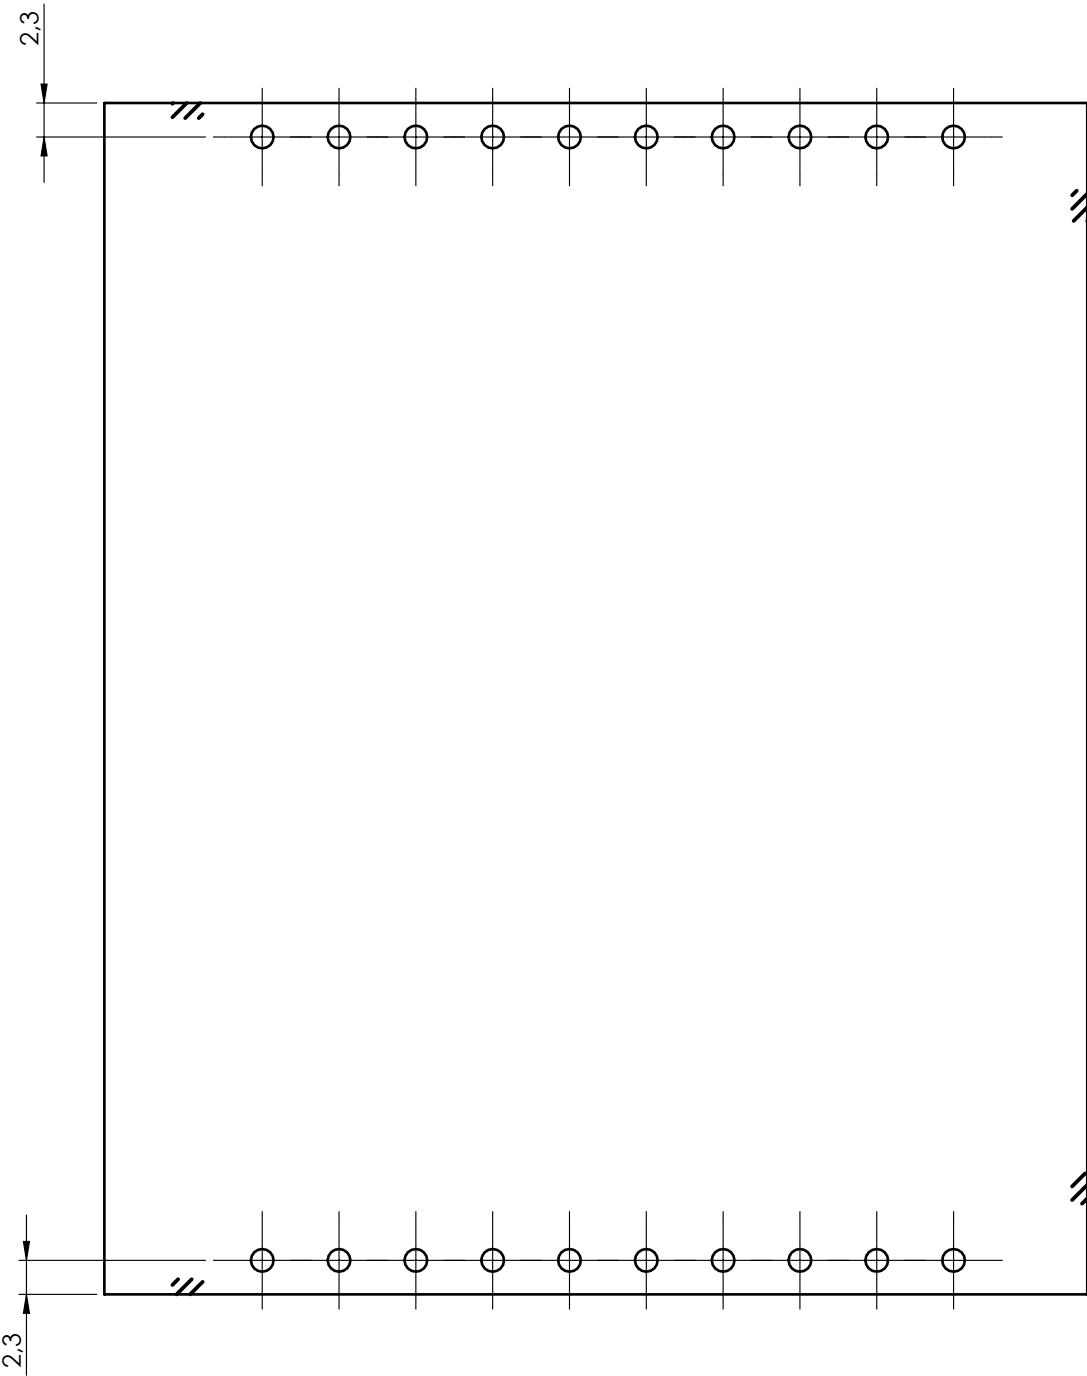

General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	PCB
Scale: 2:1	Drawn: D.S.	Checked: R.N.	Date: 07/04/2025	Material:	Process:
Dimension in mm		Derived from:		Weight: gr	Cod. Mold: --
		Description: KIT CONTENITORE RAILBOX COMPACT VERTICAL 17.5 MM KIT ENCLOSURE RAILBOX COMPACT 17.5 MM			
		Drawing nr.: 3_110_00040		Rev.: 00 A2	

